


Fujitsu Printer 9890S



Boarding Pass & Baggage Tag Printer Module As General Purpose Printer Module For Airline Ticketing Self Service Solution

Fujitsu Printer 9890S is Airline Ticketing Printer Module for Self-Baggage Drop (SBD) and KIOSK. Utilizing Fujitsu's rich experiences and solution know-how in the field of airline printer environment, we have developed captioned new printer module by capturing latest requirements from end users and/or airline solution providers.

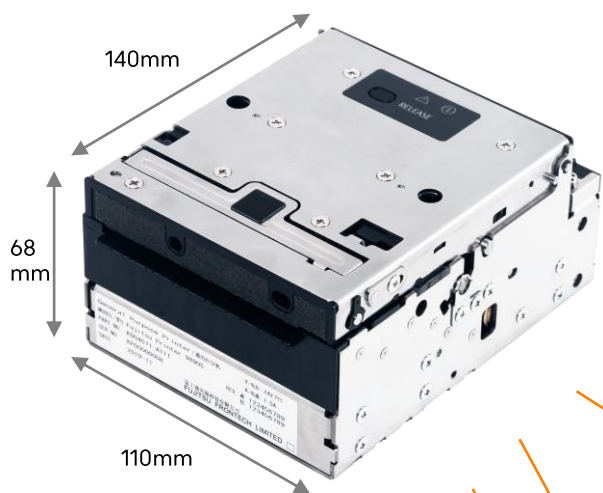

Field Upgrade

- 1) RFID...Customers can be retrofitted when necessary. No need special skill. It can be added at the field by customers.
- 2) Liner-Less...Customers can choose General model or Liner-Less model. Even if Customers chose general model, they can upgrade to Liner-Less model only by changing Platen Roller and Cutter Unit for Liner-Less.

Satisfactory standard equipment

Cutter Unit, Cut& Cramp functions are standard equipment

Compact Size for Installation

This small size assists SBD/ KIOSK manufacturer to make their machine smaller

Versatile Interfaces

SITA CUTE, ARINC vMUSE: MUSE, cMUSE, Navitaire, Amadeus, TAV CUPPS, TravelSky, Microsoft Windows®
*find detail in next page

Fujitsu Printer 9890S
KD04571- A101 (General)
KD04571- A111 (Liner-less)

Options



RFID Option



Damper Option



Cutter Unit (General)
Cutter Unit for Liner Less

Platen Roller (General)
Coated Platen Roller for Liner Less



Specifications

Physical Data	F9890S : W 110 – D 140 – H 68 (mm) / 1.4kg [W 4.4 – D 5.6 – H 2.7 (inch) / 3.1 lb] F9890S + RFID : W 110 – D 170 – H 68 (mm) / 1.6kg [W 4.4 – D 6.7 – H 2.7 (inch) / 3.6 lb]
MTBF (Mean Time Between Failure)	500,000 Hours (Electric Board)
Connectivity	USB 2.0 (F9890 has the virtual com for RS232C.)
Power Supply	24Vdc
Environment Installed	150VA maximum at operation, 5.0VA maximum at standby • At operation : 5 to 40°C / 30 to 85%RH Alarm buzzer, 0 - 5,000m altitude • At storage : -5 to 50°C / 5 to 95%RH
Easy Maintenance	The computer tool for diagnostic and test function Statistics data for transactions by log files Dot detection
Printer modules	• Direct Thermal Resolution : 203dpi • Printer Line width : 80mm • Selectable Printer Speed : 5,6,7,8 inch/sec • Selectable Print Density
Barcode	• Conform to the ITPS* standard -1D : Interleaved 2 of 5 / Industrial 2 of 5 / Code 39 & Code 128 / EAN 13 -2D : PDF417 / Aztec / Data Matrix / QR
Conformable Standards	ITPS 2019 compatible ※Consultation is needed on some special items IATA Resolution 722e IATA Resolution 740 and 1740e
Data Interface	ITPS* standard *Formerly known as AEA technical specification Certified by : ARINC vMUSE / ARINC iMUSE / ARINC cMUSE/ SITA AirportConnect (CUTE) / SITA Liaison / ICM Airport Technics, an Amadeus company products/ Microsoft Windows ®driver for airline use / TAV CUPPS/ Navitaire GoNow&NewSkies / Travelsky / Travelsky Angel are compatible Will be certified by : Amadeus Air IT/ Americas EASE/ Materna IPS GmbH ULTRA CUSE ※Update sequentially
Agency Approvals	UL • cUL • BIS • KC ※Update sequentially
Option	RFID unit, Near-end sensor, AC Adaptor, USB2.0 Cable ASSY, Damper

Contact

TAKAMISAWA CYBERNETICS CO., LTD

48-5, 2-CHOME, CHUO, NAKANO-KU, TOKYO 164-0011, JAPAN

E-mail: airline_ml@tacy.co.jp

URL: <https://www.tacy.co.jp/>

Inquiry: https://www.tacy.co.jp/en/inquiry/agreement_sales/

©2024 Copyright Fujitsu Frontech Limited All rights reserved. All trademarks are the property of their respective owners. Statements herein are based on normal operating conditions and are not intended to create any implied warranty of merchantability or fitness for a particular purpose. Fujitsu Frontech Limited reserves the right to modify, at any time without notice, these state-ments, our services, products, and their warranty and performance specifications.